

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/052820 A1

(51) International Patent Classification⁷: **C07C 51/47**,
63/26, 51/265

(21) International Application Number:
PCT/US2003/038305

(22) International Filing Date: 3 December 2003 (03.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/315,295 9 December 2002 (09.12.2002) US
10/315,294 9 December 2002 (09.12.2002) US
10/645,737 21 August 2003 (21.08.2003) US
10/645,734 21 August 2003 (21.08.2003) US
10/667,774 22 September 2003 (22.09.2003) US

(71) Applicant: **EASTMAN CHEMICAL COMPANY**
[US/US]; 100 North Eastman Road, Kingsport, TN 37660
(US).

(72) Inventors: **SUMNER, Charles, Edwan, Jr.**; 4280
Orebank Road, Kingsport, TN 37664 (US). **BOWERS,**
David, Taylor; 4244 Reservoir Road, Kingsport, TN
37660 (US). **GIBSON, Philip, Edward**; 2244 Charsley
Road, Kingsport, TN 37660 (US). **LIN, Robert**; 4533
Palomino Drive, Kingsport, TN 37664 (US). **ARNOLD,**

Ernest, William, III; 5036 Willow Pond Road, Lake
Wylie, SC 29710 (US). **FUGATE, Eric, Jackson**; Route
4, Box 371A, Gate City, VA 24251 (US). **STEVENSON,**
George, M.; 299 Old Mill Road, Blountville, TN 37617
(US). **MCCLANAHAN, Wayne**; 1532 Warpath Drive,
Kingsport, TN 37664 (US). **CARRELL, Harry, Lee**;
4400 Chickasaw Road, Kingsport, TN 37664 (US).


(74) Agent: **OWEN, Steven, A.**; P.O. Box 511, Kingsport, TN
37662-5075 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PROCESS FOR THE PURIFICATION OF A CRUDE CARBOXYLIC ACID SLURRY

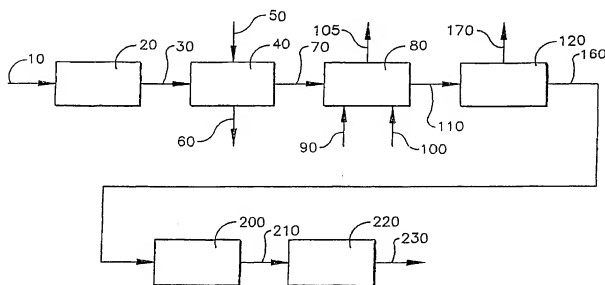

(57) Abstract: Disclosed is a process to produce a purified carboxylic acid product. The process comprises removing impurities from a crude carboxylic acid slurry in a solid-liquid displacement zone to form a slurry product. The slurry product if further treated in a staged oxidation zone and a crystallization zone to form a crystallized product. The crystallized product is further cooled in a cooling zone and subsequently filtered and dried in a filtration and drying zone. The process produces purified carboxylic acid product having good color and low impurity levels without the use of purification steps like hydrogenation.

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

-1-

PROCESS FOR THE PURIFICATION OF A CRUDE CARBOXYLIC ACID SLURRY

5

FIELD OF INVENTION

The present invention relates to a process for the purification of a crude carboxylic acid slurry. More specifically, the present invention relates to a process for the purification of a crude carboxylic acid slurry by utilizing a solid-liquid displacement zone between a primary oxidation zone and a staged oxidation zone.

10

BACKGROUND OF THE INVENTION:

15

Terephthalic acid is commercially produced by oxidation of paraxylene in the presence of a catalyst, such as, for example, Co, Mn, Br and a solvent. Terephthalic acid used in the production of polyester fibers, films, and resins must be further treated to remove impurities present due to the oxidation of para-xylene. Typical commercial process produce a crude terephthalic acid then dissolve the solid crude terephthalic acid in water at high temperatures and pressures, hydrogenate the resultant solution, cool and crystallize the terephthalic acid product out of solution, and separate the solid terephthalic product from the liquid as discussed in U.S. Patent No. 3,584,039 herein incorporated by reference.

20

-2-

A number of processes for producing the purified terephthalic acid solid have been developed and are commercially available. Usually, the purified terephthalic acid solid is produced in a multi-step process wherein a crude terephthalic acid is produced. The crude terephthalic acid does not
5 have sufficient quality for direct use as starting material in commercial polyethylene terephthalate(PET). Instead, the crude terephthalic acid is usually refined to purified terephthalic acid solid.

Liquid phase oxidation of p-xylene produces crude terephthalic acid. The crude terephthalic acid is dissolved in water and hydrogenated for the
10 purpose of converting 4-carboxybenzaldehyde to p-toluic acid, which is a more water-soluble derivative, and for the purpose of converting characteristically yellow compounds to colorless derivatives. Significant 4-carboxybenzaldehyde and p-toluic acid in the final purified terephthalic acid product is particularly detrimental to polymerization processes as they may
15 act as chain terminators during the condensation reaction between terephthalic acid and ethylene glycol in the production of PET. Typical purified terephthalic acid contains on a weight basis less than 250 parts per million (ppm) 4-carboxybenzaldehyde and less than 150 ppm p-toluic acid.

The crude terephthalic acid typically contains on a weight basis from
20 about 800 to 7,000 parts per million (ppm) 4-carboxybenzaldehyde and about 200 to 1,500 ppm p-toluic acid as the main impurities. The crude terephthalic acid also contains lesser amounts, about 20-200 ppm range, of aromatic compounds having the structures derived from benzil, fluorenone,

and/or anthraquinone, which are characteristically yellow compounds as impurities resulting from coupling side reactions occurring during oxidation of p-xylene

Such a purification process typically comprises adding water to the
5 crude terephthalic acid to form a crude terephthalic acid slurry, which is heated to dissolve the crude terephthalic acid. The crude terephthalic acid solution is then passed to a reactor zone in which the solution is contacted with hydrogen in the presence of a heterogeneous catalyst at temperatures of about 200° to about 375° C. This reduction step converts the various
10 color causing compounds present in the crude terephthalic acid to colorless derivatives. The principal impurity, 4-carboxybenzaldehyde, is converted to p-toluic acid.

Typical crude terephthalic acid contains excessive amounts of both 4-carboxybenzaldehyde and p-toluic acid on a weight basis. Therefore, to
15 achieve less than 250 ppmw 4-carboxybenzaldehyde and less than 150 ppmw p-toluic acid in the purified terephthalic acid requires mechanisms for purifying the crude terephthalic acid and removing the contaminants.

In many processes, colored impurities are hydrogenated to colorless derivatives and leave the process with the terephthalic acid solid product
20 and waste water streams. However, one embodiment of this invention provides an attractive process to produce a purified carboxylic acid slurry by utilizing a solid-liquid displacement zone comprising a solid-liquid separator

-4-

after oxidation of a crude carboxylic acid slurry product and prior to final filtration and drying without the use of an hydrogenation step.

5

SUMMARY OF THE INVENTION

In one embodiment of the invention, a process to produce the purified carboxylic acid product is provided without the use of hydrogenation of the terephthalic acid or a process separating impurities from oxidation solvent as disclosed in U.S. patent #3,584,039.

10

In another embodiment of this invention, a process to produce a slurry product is provided. The process comprises removing impurities from a crude carboxylic acid slurry in a solid-liquid displacement zone to form a slurry product.

15

In another embodiment of this invention, a process to produce a purified carboxylic acid product is provided. The process comprises:

- (a) removing impurities from a crude carboxylic acid slurry in a solid-liquid displacement zone to form a slurry product;
- (b) oxidizing the slurry product in a staged oxidation zone to form a staged oxidation product;
- (c) crystallizing the staged oxidation product in a crystallization zone to form a crystallized product.

20

In another embodiment of this invention, a process to produce a purified carboxylic acid slurry is provided. The process comprises:

- (a) removing in a solid-liquid displacement zone impurities from a crude carboxylic acid slurry to form a slurry product; wherein the crude carboxylic acid slurry comprises terephthalic acid, catalyst, acetic acid, and impurities that is withdrawn at a temperature between about 140°C and about 170°C from the oxidation of paraxylene in a primary oxidation zone;
- (b) oxidizing the slurry product in a staged oxidation zone to form a staged oxidation product; wherein the oxidizing is conducted at a temperature between about 190°C to about 280 °C; and wherein the oxidizing is at a higher temperature in the staged oxidation zone than in the primary oxidation zone;
- (c) crystallizing the staged oxidation product in a crystallization zone to form a crystallized product;
- (d) cooling the crystallized product in a cooling zone to form a cooled purified carboxylic acid slurry; and
- (e) filtering and optionally drying the cooled purified carboxylic acid slurry in a filtration and drying zone to remove a portion of the solvent from the cooled carboxylic acid slurry to produce the purified carboxylic acid product.

In yet another embodiment of this invention, a process to produce a purified carboxylic acid product is provided. The process comprises:

-6-

- (a) oxidizing an aromatic feed stock in a primary oxidation zone to form a crude carboxylic acid slurry; wherein the crude carboxylic acid slurry comprises terephthalic acid; wherein the oxidizing is conducted at a temperature between about 120°C to about 190 °C;
- 5 (b) removing in a solid-liquid displacement zone impurities from a crude carboxylic acid slurry to form a slurry product; wherein the crude carboxylic acid slurry comprises terephthalic acid, catalyst, acetic acid, and impurities that is withdrawn at a temperature between about 140°C and about 170°C from the oxidation of paraxylene in a primary oxidation zone;
- 10 (c) oxidizing the slurry product in a staged oxidation zone to form a staged oxidation product; wherein the oxidizing is conducted at a temperature between about 190°C to about 280 °C; and wherein the oxidizing is at a higher temperature in the staged oxidation zone than in the primary oxidation zone;
- 15 (d) crystallizing the staged oxidation product in a crystallization zone to form a crystallized product;
- (e) cooling the crystallized product in a cooling zone to form a cooled purified carboxylic acid slurry; and
- (f) filtering and optionally drying the cooled purified carboxylic
- 20 slurry in a filtration and drying zone to remove a portion of the solvent from the cooled carboxylic acid slurry to produce the purified carboxylic acid product.

-7-

These objects, and other objects, will become more apparent to others with ordinary skill in the art after reading this disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

5

Figure 1 is a schematic of the inventive process for the oxidative purification of carboxylic acid wherein a solid-liquid displacement zone **40** is utilized between the primary oxidation zone **20** and the staged oxidation zone **80**.

10

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a process for the purification of a crude carboxylic acid slurry **30**. The process comprises the steps of displacing a mother liquor from the crude carboxylic acid slurry in a solid-liquid displacement zone **40** to form a slurry product **70**.

Crude terephthalic acid is conventionally made via the liquid phase air oxidation of paraxylene in the presence of a suitable oxidation catalyst. Suitable catalysts comprises at least one selected from, but are not limited to, cobalt, bromine and manganese compounds, which are soluble in the selected solvent. Suitable solvents include, but are not limited to, aliphatic mono-carboxylic acids, preferably containing 2 to 6 carbon atoms, or

benzoic acid and mixtures thereof and mixtures of these compounds with water. Preferably the solvent is acetic acid mixed with water, in a ratio of about 5:1 to about 25:1, preferably between about 8:1 and about 20:1. Throughout the specification acetic acid will be referred to as the solvent.

5 However, it should be appreciated that other suitable solvents, such as those disclosed previously, may also be utilized. Patents disclosing the production of terephthalic acid such as U.S patent #4,158,738 and #3,996,271 are hereby incorporated by reference.

10 In an embodiment of this invention, a process to produce slurry product **70** is provided in Figure 1. The process comprises removing impurities from a crude carboxylic acid slurry **30** in a solid-liquid displacement zone **40** to form a slurry product **70**; wherein the slurry product **70** is formed without a hydrogenation step.

15 The solid-liquid displacement zone **40**, impurities, crude carboxylic acid slurry **30**, and slurry product **70** are all described subsequently in this disclosure.

In another embodiment of this invention a process to produce a purified carboxylic acid product **230** is provided in Figure 1. The process comprises:

20 Step (a) comprises removing impurities from a crude carboxylic acid slurry **30** in an solid-liquid displacement zone **40** to form a slurry product **70**;

A crude carboxylic acid slurry **30** comprises at least one carboxylic acid, catalyst, at least one solvent, and impurities is withdrawn via line **30**.

The impurities typically comprise at least one or more of the following compounds: 4-carboxybenzaldehyde(4-CBA), trimellitic acid(TMA), and 2,6-dicarboxyfluorenone(2,6-DCF). The solvent typically comprises acetic acid, but can be any solvent that has been previously mentioned.

5 The crude carboxylic acid slurry **30** is produced by oxidizing in a primary oxidation zone **20** an aromatic feed stock **10**. In one embodiment, the aromatic feedstock comprises paraxylene. The primary oxidation zone **20** comprises at least one oxidation reactor, and the crude carboxylic acid slurry **30** comprises at least one carboxylic acid. The oxidation reactor can
10 be operated at temperatures between about 120°C to about 200°C, preferably about 140°C to about 170°C. Typically the aromatic feed stock **10** is paraxylene and the carboxylic acid is terephthalic acid. In one embodiment of the invention the primary oxidation zone comprises a bubble column.

15 Therefore, when terephthalic acid is utilized, the crude carboxylic acid slurry **30** would be referred to as crude terephthalic acid slurry and the purified carboxylic acid product **230** would be referred to as a purified terephthalic acid product.

20 Carboxylic acids include aromatic carboxylic acids produced via controlled oxidation of an organic substrate. Such aromatic carboxylic acids include compounds with at least one carboxylic acid group attached to a carbon atom that is part of an aromatic ring, preferably having at least 6 carbon atoms, even more preferably having only carbon atoms. Suitable

-10-

examples of such aromatic rings include, but are not limited to, benzene, biphenyl, terphenyl, naphthalene, and other carbon-based fused aromatic rings. Examples of suitable carboxylic acids include, but are not limited to, terephthalic acid, benzoic acid, p-toluic, isophthalic acid, trimellitic acid, naphthalene dicarboxylic acid, and 2,5-diphenyl-terephthalic acid. Each of the embodiments of this invention can be practiced wherein there is a substantial absence of terephthalic acid and isophthalic acid in the crude carboxylic acid slurry. When the term substantial absence is used it means less than 5% by weight.

Crude terephthalic acid slurry is conventionally synthesized via the liquid phase oxidation of paraxylene in the presence of suitable oxidation catalyst. Suitable catalysts include, but are not limited to, cobalt, manganese and bromine compounds, which are soluble in the selected solvent. In one embodiment of the invention the catalyst comprises cobalt, bromine and manganese. The cobalt and manganese combined can be in concentrations of about 150 ppm to about 3200 ppm by weight in the crude carboxylic acid slurry. The bromine can be in concentrations of about 10 ppm to about 5000 ppm by weight in the crude carboxylic acid slurry. Preferably, the cobalt and manganese combined can be in concentrations of about 1050 ppm to about 2700 ppm by weight in the crude carboxylic acid slurry. The bromine can be in concentrations of about 1000 ppm to about 2500 ppm by weight in the crude carboxylic acid slurry.

The crude carboxylic acid slurry in conduit 30 is fed to a solid-liquid displacement zone 40 capable of removing a portion of the liquid contained in the crude carboxylic acid slurry 30 to produce the slurry product in conduit 70. A portion means at least 5% by weight of the liquid is removed.

5 The removal of a portion of the liquid to produce a slurry product in conduit 70 can be accomplished by any means known in the art. Typically, the solid-liquid displacement zone 40 comprises a solid-liquid separator that is selected from the group consisting of a decanter centrifuge, rotary disk centrifuge, belt filter, rotary vacuum filter, and the like. The crude carboxylic

10 acid slurry in conduit 30 is fed to the solid-liquid displacement zone 40 comprising a solid-liquid separator. The solid-liquid separator is operated at temperatures between about 50°C to about 200°C, preferably 140°C to about 170°C. The solid-liquid separator is operated at pressures between about 30 psig to about 200 psig. The solid-liquid separator in the solid-

15 liquid displacement zone 40 may be operated in continuous or batch mode, although it will be appreciated that for commercial processes, the continuous mode is preferred.

The impurities are displaced from the solid-liquid displacement zone 40 in a mother liquor and withdrawn via line 60. In one embodiment of the

20 invention, additional solvent is fed to the solid-liquid displacement zone 40 via line 50 to reslurry the crude carboxylic acid slurry 30 and form a slurry product 70. The mother liquor 60 is withdrawn from solid-liquid displacement zone 40 via line 60 and comprises a solvent, typically acetic

acid, catalyst, and bromine compounds. The mother liquor in line 60 may either be sent to a process for separating impurities from oxidation solvent via lines not shown or recycled to the catalyst system via lines not shown. One technique for impurity removal from the mother liquor 60 commonly used in the chemical processing industry is to draw out or "purge" some portion of the recycle stream. Typically, the purge stream is simply disposed of or, if economically justified, subjected to various treatments to remove undesired impurities while recovering valuable components. Examples of impurity removal processes include U.S. Patent # 4,939,297 and U.S. Patent 4,356,319, herein incorporated by reference.

Step (b) comprises oxidizing the slurry product 70 in a staged oxidation zone 80 to form a staged oxidation product 110.

In one embodiment of the invention, the slurry product 70 is withdrawn via line 70 to a staged oxidation zone 80 where it is heated to between about 190°C to about 280°C and preferably between about 200°C to about 250°C and further oxidized with air fed by line 100 to produce a staged oxidation product 110.

The staged oxidation zone 80 comprises at least one staged oxidation reactor vessel. The slurry product 70 is fed to the staged oxidation zone 80. The term "staged" means that the oxidation occurs in both the primary oxidation zone 20 discussed previously as well as in the staged oxidation zone 80. For example, the staged oxidation zone 80 can comprise staged oxidation reactor vessels in series.

When the carboxylic acid is terephthalic acid, the staged oxidation zone 80 comprises an oxidation reactor that is heated to between about 190°C to about 280°C, preferably between about 200°C to about 250°C, and most preferably between 205 °C to 225°C and further oxidized with air or a source of molecular oxygen fed by line 100 to produce a staged oxidation product 110. Generally, oxidation in the staged oxidation zone 80 is at a higher temperature than the oxidation in the primary oxidation zone 20 to enhance the impurity removal. The staged oxidation zone 80 can be heated directly with solvent vapor, or steam via conduit 90 or indirectly by any means known in the art. Purification in the staged oxidation zone takes place by a mechanism involving recrystallization or crystal growth and oxidation of impurities.

Additional air or molecular oxygen may be fed via conduit 100 to the staged oxidation zone 80 in an amount necessary to oxidize a substantial portion of the partially oxidized products such as 4-carboxybenzaldehyde (4-CBA) in the crude carboxylic acid slurry 30 or slurry product 70 to the corresponding carboxylic acid. Generally, at least 70% by weight of the 4-CBA is converted to terephthalic acid in the staged oxidation zone 80. Preferably, at least 80% by weight of the 4-CBA is converted to terephthalic acid in the staged oxidation zone 80. Significant concentrations of 4-carboxybenzaldehyde and p-toluic acid in the terephthalic acid product are particularly detrimental to polymerization processes as they may act as chain terminators during the condensation reaction between terephthalic

acid and ethylene glycol in the production of polyethylene terephthalate(PET). Typical terephthalic acid product contains on a weight basis less than about 250 parts per million (ppm) 4-carboxybenzaldehyde and less than about 150 ppm p-toluic acid

5 Impurities in the crude carboxylic acid slurry **30** or slurry product **70** go into solution as the terephthalic acid particles are dissolved and re-crystallized in staged oxidation zone **80**. Offgas from the staged oxidation zone **80** is withdrawn via line **105** and fed to a recovery system where the solvent is removed from the offgas comprising volatile organic compounds
10 (VOCs). VOCs including methyl bromide may be treated, for example by incineration in a catalytic oxidation unit. The staged oxidation product **110** from the staged oxidation zone **80** is withdrawn via line **110**.

Step (c) comprises crystallizing the staged oxidation product **110** in a crystallization zone **120** to form a crystallized product **160**. Generally, the
15 crystallization zone **120** comprises at least one crystallizer. Vapor product from the crystallization zone can be condensed in at least one condenser and returned to the crystallization zone. Optionally, the liquid from the condenser or vapor product from the crystallization zone can be recycled, or it can be withdrawn or sent to an energy recovery device. In addition, the
20 crystallizer offgas is removed via line **170** and can be routed to a recovery system where the solvent is removed and crystallizer offgas comprising VOCs may be treated, for example by incineration in a catalytic oxidation unit.

When the carboxylic acid is terephthalic acid, the staged oxidation product **110** from the staged oxidation zone **80** is withdrawn via line **110** and fed to a crystallization zone **120** comprising at least one crystallizer where it is cooled to a temperature between about 110°C to about 190°C to form a crystallized product **160**, preferably to a temperature between about 140°C to about 180°C, most preferably about 150°C to about 170°C.

The crystallized product **160** from the crystallization zone **120** is withdrawn via line **160**. Typically, the crystallized product **160** is then fed directly to a vessel and cooled to form a cooled purified carboxylic acid slurry **210**. When the carboxylic acid is terephthalic acid, the cooled crystallized purified carboxylic acid slurry **210** is cooled in a vessel to typically a temperature of approximately 90° C or less before being introduced into a process for recovering the terephthalic acid as a dry powder or wet cake.

Step (d) comprises cooling the crystallized product in a cooling zone **200** to form a cooled purified carboxylic acid slurry **210**.

The crystallized product **160** is withdrawn from the crystallization zone **120** via line **160**. The crystallized product **160** is fed to a cooling zone **200** and cooled to less than about 90 °C to form the cooled purified carboxylic acid slurry **210**. The cooling of the purified carboxylic acid slurry can be accomplished by any means known in the art, typically the cooling zone **200** comprises a flash tank,

-16-

Step (e) comprises filtering and optionally drying the cooled purified carboxylic acid slurry **210** in a filtration and drying zone **220** to remove a portion of the solvent from the cooled purified carboxylic acid slurry **210** to produce the purified carboxylic acid product **230**.

5 The cooled, purified carboxylic acid slurry **210** is withdrawn from cooling zone **200** and fed to a filtration and drying zone **220**. A portion of the solvent and remaining catalyst and impurities is separated, and the purified carboxylic acid product is withdrawn via line **230**.

10 The filtration and drying zone **220** comprises a filter suitable for recovering the solid carboxylic acid and a dryer. The filtration can be accomplished by any means known in the art. For example, a rotary vacuum filter can be used for the filtration to produce a filtration cake. The filtration cake goes through an initial solvent removal step, is then rinsed with acid wash to remove residual catalyst, and then solvent removed again
15 before being sent to the dryers. The drying of the filter cake can be accomplished by any means known in the art that's capable of evaporating at least 10% of the volatiles remaining in the filter cake to produce the carboxylic acid product. For example, a Single Shaft Porcupine® Processor dryer can be used.

20 The purified carboxylic acid product **230** has a b^* less than about 4.5. Preferably, the b^* color of the purified carboxylic acid product **230** is less than about 3.5. Most preferably, the b^* color in purified carboxylic acid product **230** is less than about 3. The b^* color is one of the three-color

attributes measured on a spectroscopic reflectance-based instrument. The color can be measured by any device known in the art. A Hunter Ultrascan XE instrument in reflectance mode is typically the measuring device.

Positive readings signify the degree of yellow (or absorbance of blue), while
5 negative readings signify the degree of blue (or absorbance of yellow).

It should be appreciated that the process zones previously described can be utilized in any other logical order to produce the purified carboxylic acid product. It should also be appreciated that when the process zones are reordered that the process conditions may change.

10 In another embodiment of this invention each embodiment can optionally include an additional step comprising decolorizing the carboxylic acid or an esterified carboxylic acid via hydrogenation.

The decolorizing of the purified carboxylic acid slurry or an esterified carboxylic acid can be accomplished by any means known in the art and is
15 not limited to hydrogenation. However, for example in one embodiment of the invention, the decolorizing can be accomplished by reacting a carboxylic acid that has undergone esterification treatment, for example with ethylene glycol, with molecular hydrogen in the presence of a hydrogenation catalyst in a reactor zone to produce a decolorized
20 carboxylic acid solution or a decolorized ester product. For the reactor zone, there are no special limitations in the form or construction thereof, subject to an arrangement that allows supply of hydrogen to effect intimate contact of the carboxylic acid or ester product with the catalyst in the

-18-

reactor zone. Typically, the hydrogenation catalyst is usually a single Group VIII metal or combination of Group VIII metals. Preferably, the catalyst is selected from a group consisting of palladium, ruthenium, rhodium and combination thereof. The reactor zone comprises a

5 hydrogenation reactor that operates at a temperature and pressure sufficient to hydrogenate a portion of the characteristically yellow compounds to colorless derivatives

EXAMPLES

This invention can be further illustrated by the following example of preferred embodiments thereof, although it will be understood that these examples are included merely for purposes of illustration and are not intended to limit the scope of the invention unless otherwise specifically indicated.

Example

Paraxylene was oxidized at 160°C utilizing a Co, Mn, Br catalyst system to produce a crude terephthalic acid slurry having 30-35% solids. The crude terephthalic acid slurry was crystallized and purified using the process shown in Figure 1. with the omission of a hydrogenation step and the crystallized product from the crystallization zone 120 was transferred directly to flash tank. The product was removed after filtration and drying and analyzed for 4-carboxybenzaldehyde(4-CBA), trimellitic acid(TMA), and 2,6-dicarboxyfluorenone(2,6-DCF), percent transmittance and b*. The b* is one of the three-color attributes measured on a spectroscopic reflectance-based instrument. A Hunter Ultrascan XE instrument is typically the measuring device. Positive readings signify the degree of yellow (or absorbance of blue), while negative readings signify the degree of blue (or absorbance of yellow).

The concentrations of 4-CBA, TMA, 2,6-DCF in the terephthalic acid were analyzed via liquid chromatography. To determine the percent

transmittance, a 10% solution of terephthalic acid product in 2M KOH was measured using a UV visible spectrometer at 340nm. The b^* of the terephthalic acid was measured using a reflectance color method at 340nm. The results are shown in Table 1.

5

Ex. #	4-CBA ¹ (ppm)	TMA ² (ppm)	2,6-DCF ³ (ppm)	%T ⁴	b^{*5}
1	103	51	10	89	4.1

The amount of 4-CBA present in the purified terephthalic acid product produced by the process of the present invention decreased significantly from typical levels found in the crude carboxylic acid slurry. The typical levels weren't measured during this trial but these levels were known to those skilled in the art to be about what has been previously disclosed wherein the crude carboxylic acid slurry comprising terephthalic acid, typically contains on a weight basis from about 800 to 7,000 parts per million (ppm) 4-carboxybenzaldehyde. The % transmittance of the purified terephthalic acid product has a direct influence on the color of the polyethylene terephthalate (PET) produced. Desirable PTA (purified terephthalic acid) is white (which is referred to as having low color). Higher % transmittance indicates less color in the PTA. The degree of improvement in all the measured categories is particularly surprising given

the simplicity of the centrifugation in the solid-liquid separation zone and that no hydrogenation step was performed. In the past, comparable purity levels have been achieved typically by utilization of a hydrogenation plant which includes numerous steps and pieces of equipment, and significant capital investment.

5

The invention has been described in detail with particular reference to preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention

WE CLAIM:

1. A process to produce a slurry product, said process comprising removing impurities from a crude carboxylic acid slurry in a solid-liquid displacement zone to form said slurry product.
2. The process according to claim 1 wherein said solid-liquid displacement zone comprises a solid-liquid separator that is operated at a temperature between about 50 °C to about 200 °C.
3. The process according to claim 1 wherein said solid-liquid displacement zone comprises a solid-liquid separator that is operated at a temperature between about 140 °C to about 170 °C.
4. The process according to claim 2 wherein said solid-liquid displacement zone comprises a solid-liquid separator that is operated at a pressure between about 30 psig to about 200 psig.
5. The process according to claim 1 wherein said solid-liquid displacement zone comprises a decanter centrifuge.
6. The process according to claim 1 wherein said solid-liquid displacement zone comprises a solid-liquid separator selected from the group consisting of a belt filter, a rotary vacuum filter and a rotary disk pack centrifuge.
7. The process according to claim 1 wherein said solid-liquid displacement zone is operated at a pressure of less than about 100 psia.

8. The process according to claim 1 wherein said solid-liquid displacement zone is operated in continuous mode.
9. The process according to claim 1 wherein said slurry product is formed without hydrogenation.
- 5 10. A process to produce a purified carboxylic acid product said process comprising:
 - (a) removing impurities from a crude carboxylic acid slurry in a solid-liquid displacement zone to form a slurry product;
 - (b) oxidizing said slurry product in a staged oxidation zone to
10 form a staged oxidation product;
 - (c) crystallizing said staged oxidation product in a crystallization zone to form a crystallized product.
11. The process according to claim 10 further comprising cooling said crystallized product in a cooling zone to form a cooled purified
15 carboxylic acid slurry.
12. The process according to claim 11 further comprising filtering and optionally drying said cooled purified carboxylic slurry in a filtration and drying zone to remove a portion of the solvent from said cooled carboxylic acid slurry to produce said purified carboxylic acid
20 product.
13. The process according to claim 10, 11 or 12 wherein said solid-liquid displacement zone comprises a solid-liquid separator that is operated at a temperature between about 50 °C to about 200 °C.

-24-

14. The process according to claim 10, 11, or 12 wherein said crude carboxylic acid slurry comprises terephthalic acid, catalyst, acetic acid, and impurities that is withdrawn at a temperature between about 110°C to about 200°C from the primary oxidation zone.
- 5 15. The process according to claim 12 wherein said solid-liquid displacement zone comprises a solid-liquid separator selected from the group consisting of a belt filter, a rotary vacuum filter and a rotary disk pack centrifuge.
- 10 16. The process according to claim 12 wherein said purified slurry is formed without hydrogenation.
17. The process according to claim 15 wherein said purified slurry product has a b^* of less than about 4.5.
18. The process according to claim 14 wherein said catalyst comprises cobalt, manganese and bromine compounds.
- 15 19. The process according to claim 18 wherein the cobalt and manganese combined is present in concentrations of about 150 ppm to about 3200 ppm by weight in the crude carboxylic acid slurry and the bromine can be in concentrations of about 10 ppm to about 5000 ppm by weight in the crude carboxylic acid slurry.
- 20 20. A process to produce a purified carboxylic acid product comprising:
(a) removing in a solid-liquid displacement zone impurities from a crude carboxylic acid slurry to form a slurry product; wherein said crude carboxylic acid slurry comprises terephthalic acid, catalyst,

acetic acid, and impurities that is withdrawn at a temperature between about 140°C and about 170°C from the oxidation of paraxylene in a primary oxidation zone;

5 (b) oxidizing said slurry product in a staged oxidation zone to form a staged oxidation product; wherein said oxidizing is conducted at a temperature between about 190°C to about 280 °C; and wherein said oxidizing is at a higher temperature in said staged oxidation zone than in said primary oxidation zone;

10 (c) crystallizing said staged oxidation product in a crystallization zone to form a crystallized product;

(d) cooling said crystallized product in a cooling zone to form a cooled purified carboxylic acid slurry; and

15 (e) filtering and optionally drying said cooled purified carboxylic slurry in a filtration and drying zone to remove a portion of the solvent from said cooled carboxylic acid slurry to produce said purified carboxylic acid product.

21. A process to produce a purified carboxylic acid product comprising:

20 (a) oxidizing an aromatic feed stock in a primary oxidation zone to form a crude carboxylic acid slurry; wherein said crude carboxylic acid slurry comprises terephthalic acid; wherein said oxidizing is conducted at a temperature between about 120°C to about 200 °C;

(b) removing in a solid-liquid displacement zone impurities from a crude carboxylic acid slurry to form a slurry product; wherein said

-26-

crude carboxylic acid slurry comprises terephthalic acid, catalyst, acetic acid, and impurities that is withdrawn at a temperature between about 140°C and about 170°C from the oxidation of paraxylene in a primary oxidation zone;


- 5 (c) oxidizing said slurry product in a staged oxidation zone to form a staged oxidation product; wherein said oxidizing is conducted at a temperature between about 190°C to about 280 °C; and wherein said oxidizing is at a higher temperature in said staged oxidation zone than in said primary oxidation zone;
- 10 (d) crystallizing said staged oxidation product in a crystallization zone to form a crystallized product;
- (e) cooling said crystallized product in a cooling zone to form a cooled purified carboxylic acid slurry; and
- (f) filtering and optionally drying said cooled purified carboxylic
- 15 slurry in a filtration and drying zone to remove a portion of the solvent from said cooled carboxylic acid slurry to produce said purified carboxylic acid product.
22. The process according to claim 20 or 21 further comprising decolorizing in a reactor zone said purified carboxylic acid slurry or a
- 20 carboxylic acid that has been esterified.
23. The process according to claim 22 wherein said decolorizing is accomplished by reacting said crude carboxylic acid solution with

-27-

hydrogen in the presence of a hydrogenation catalyst in a reactor zone to produce a decolorized carboxylic acid solution.

24. The process according to claim 20 or 21 wherein said solid-liquid displacement zone comprises a solid-liquid separator that is
5 operated at a temperature between about 50 °C to about 200 °C.
25. The process according to claim 20 or 21 wherein said purified slurry product has a b^* of less than about 4.5.
26. The process according to claim 21 wherein said catalyst comprises cobalt, manganese and bromine compounds.
- 10 27. The process according to claim 26 wherein the cobalt and manganese combined is present in concentrations of about 1050 ppm to about 2700 ppm by weight in the crude carboxylic acid slurry and the bromine can be in concentrations of about 1000 ppm to about 2500 ppm by weight in the crude carboxylic acid slurry.
- 15 28. The process according to claim 1, 10, 19, 20 or 21 wherein said crude carboxylic acid slurry comprises terephthalic acid.
29. A slurry product produced by the process in claim 21.
30. A staged oxidation product produced by the process of claim 21.
31. A crystallized product produced by the process of claim 21.

1/1

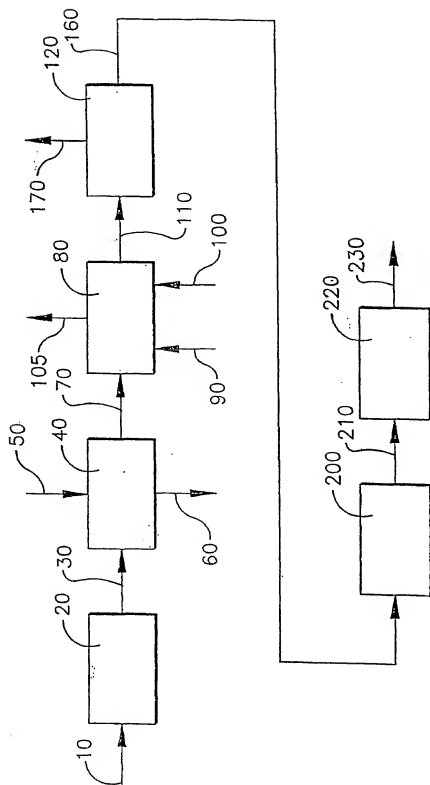Fig. 1

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/38305A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C07C51/47 C07C63/26 C07C51/265

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 170 768 A (BALDWIN RICHARD H) 23 February 1965 (1965-02-23) column 3, line 39 -column 4, line 56	1-9
Y	US 5 359 133 A (MANZUROV VLADIMIR DMITRIEVICH ET AL) 25 October 1994 (1994-10-25) claims; examples; table 1	10-31
X	US 4 357 475 A (HANOTIER JACQUES D ET AL) 2 November 1982 (1982-11-02) column 1, line 24 - line 29 column 1, line 59 -column 2; claim 1	1-4
A	WO 94/17892 A (URE ALAN MACPHERSON ;ICI PLC (GB)) 18 August 1994 (1994-08-18) the whole document	10-31
A		1,6

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

6 May 2004

Date of mailing of the international search report

02/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bedel, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/38305

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3170768	A	23-02-1965	NONE	
US 5359133	A	25-10-1994	RU 2047595 C1	10-11-1995
			RU 2047594 C1	10-11-1995
			AU 5576394 A	18-04-1995
			BE 1008546 A4	04-06-1996
			BG 62324 B1	31-08-1999
			BG 98919 A	31-05-1995
			BR 9305996 A	21-10-1997
			CA 2128719 A1	29-03-1995
			CN 1103860 A , B	21-06-1995
			DE 4397599 C2	19-02-1998
			DE 4397599 T0	24-07-1997
			ES 2081265 A1	16-02-1996
			FR 2710638 A1	07-04-1995
			GB 2286588 A , B	23-08-1995
			IT MI941879 A1	28-03-1995
			JP 3009223 B2	14-02-2000
			WO 9509143 A1	06-04-1995
			KR 9700136 B1	04-01-1997
			PL 308537 A1	21-08-1995
			RO 113850 B1	30-11-1998
			SK 87794 A3	10-05-1995
			JP 8506571 T	16-07-1996
US 4357475	A	02-11-1982	GB 2072162 A	30-09-1981
			BE 887785 A1	01-07-1981
			DE 3111335 A1	04-02-1982
			FR 2478627 A1	25-09-1981
			IT 1136570 B	03-09-1986
			JP 1461689 C	14-10-1988
			JP 56133239 A	19-10-1981
			JP 63009498 B	29-02-1988
			NL 8101374 A	16-10-1981
WO 9417892	A	18-08-1994	AT 185282 T	15-10-1999
			AU 685419 B2	22-01-1998
			AU 5888794 A	29-08-1994
			BR 9406268 A	02-01-1996
			CA 2153309 A1	18-08-1994
			CN 1117270 A , B	21-02-1996
			DE 69421068 D1	11-11-1999
			EG 20386 A	28-02-1999
			EP 0682554 A1	22-11-1995
			WO 9417892 A1	18-08-1994
			IN 188681 A1	26-10-2002
			JP 8506049 T	02-07-1996
			MX 9400906 A1	31-08-1994
			RU 2125979 C1	10-02-1999
			SG 47014 A1	20-03-1998
			US 5643468 A	01-07-1997
			ZA 9400444 A	05-08-1994

CORRECTED VERSION

**(19) World Intellectual Property
Organization
International Bureau**



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/052820 A1


- (51) **International Patent Classification²:** **C07C 51/47,**
63/26, 51/265
- (21) **International Application Number:**
PCT/US2003/038305
- (22) **International Filing Date:** 3 December 2003 (03.12.2003)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
- | | | |
|------------|--------------------------------|----|
| 10/315,295 | 9 December 2002 (09.12.2002) | US |
| 10/315,294 | 9 December 2002 (09.12.2002) | US |
| 10/645,737 | 21 August 2003 (21.08.2003) | US |
| 10/645,734 | 21 August 2003 (21.08.2003) | US |
| 10/667,744 | 22 September 2003 (22.09.2003) | US |
- (71) **Applicant:** EASTMAN CHEMICAL COMPANY
[US/US]; 100 North Eastman Road, Kingsport, TN 37660
(US).
- (72) **Inventors:** SUMNER, Charles, Edwan, Jr.; 4280
Orebank Road, Kingsport, TN 37664 (US). BOWERS,

David, Taylor; 4244 Reservoir Road, Kingsport, TN 37660 (US). GIBSON, Philip, Edward; 2244 Chansley Road, Kingsport, TN 37660 (US). LIN, Robert; 4533 Palomino Drive, Kingsport, TN 37664 (US). ARNOLD, Ernest, William, III; 5036 Willow Pond Road, Lake Wylie, SC 29710 (US). FUGATE, Eric, Jackson; Route 4, Box 371A, Gate City, VA 24251 (US). STEVENSON, George, M.; 299 Old Mill Road, Blountville, TN 37617 (US). CARRELL, Harry, Lee; 4400 Chickasaw Road, Kingsport, TN 37664 (US). MCCLANAHAN, Wayne (deceased).

- (74) Agent: OWEN, Steven, A.; P.O. Box 511, Kingsport, TN 37662-5075 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LK, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, ME, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: PROCESS FOR THE PURIFICATION OF A CRUDE CARBOXYLIC ACID SLURRY

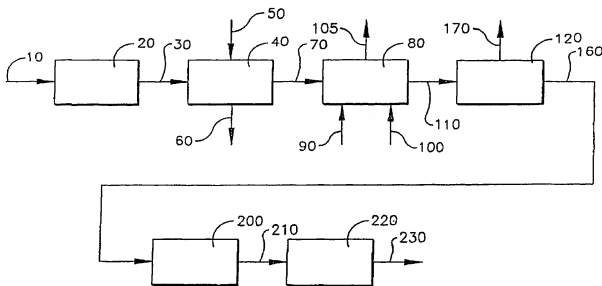

(57) **Abstract:** Disclosed is a process to produce a purified carboxylic acid product. The process comprise removing impurities from a crude carboxylic acid slurry in a solid-liquid displacement zone to form a slurry product. The slurry product if further treated in a staged oxidation zone and a crystallization zone to from a crystallized product. The crystallized product is further cooled in a cooling zone and subsequently filtered and dried in a filtration and drying zone. The process produces purified carboxylic acid product having good color and low impurity levels without the use of purification steps like hydrogenation.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(48) Date of publication of this corrected version:

30 September 2004

(15) Information about Correction:

see PCT Gazette No. 40/2004 of 30 September 2004, Sec-
tion II

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*